



Dear Customer, thank you for your trust and for purchasing this Wunderlich product.



This installation guide will assist you in the safe and proper installation of your product.

Important Note

Please read this guide completely before starting the installation.

Support

If you have any questions during the installation, please contact our support before beginning the work:

Tel.: +49 2641-3082-240

E-Mail: support@wunderlich.de

We wish you much enjoyment with your Wunderlich product and always a safe ride.


Your #TeamWunderlich




#49107-402

Wunderlich®




Tank ring for CLICK BAG

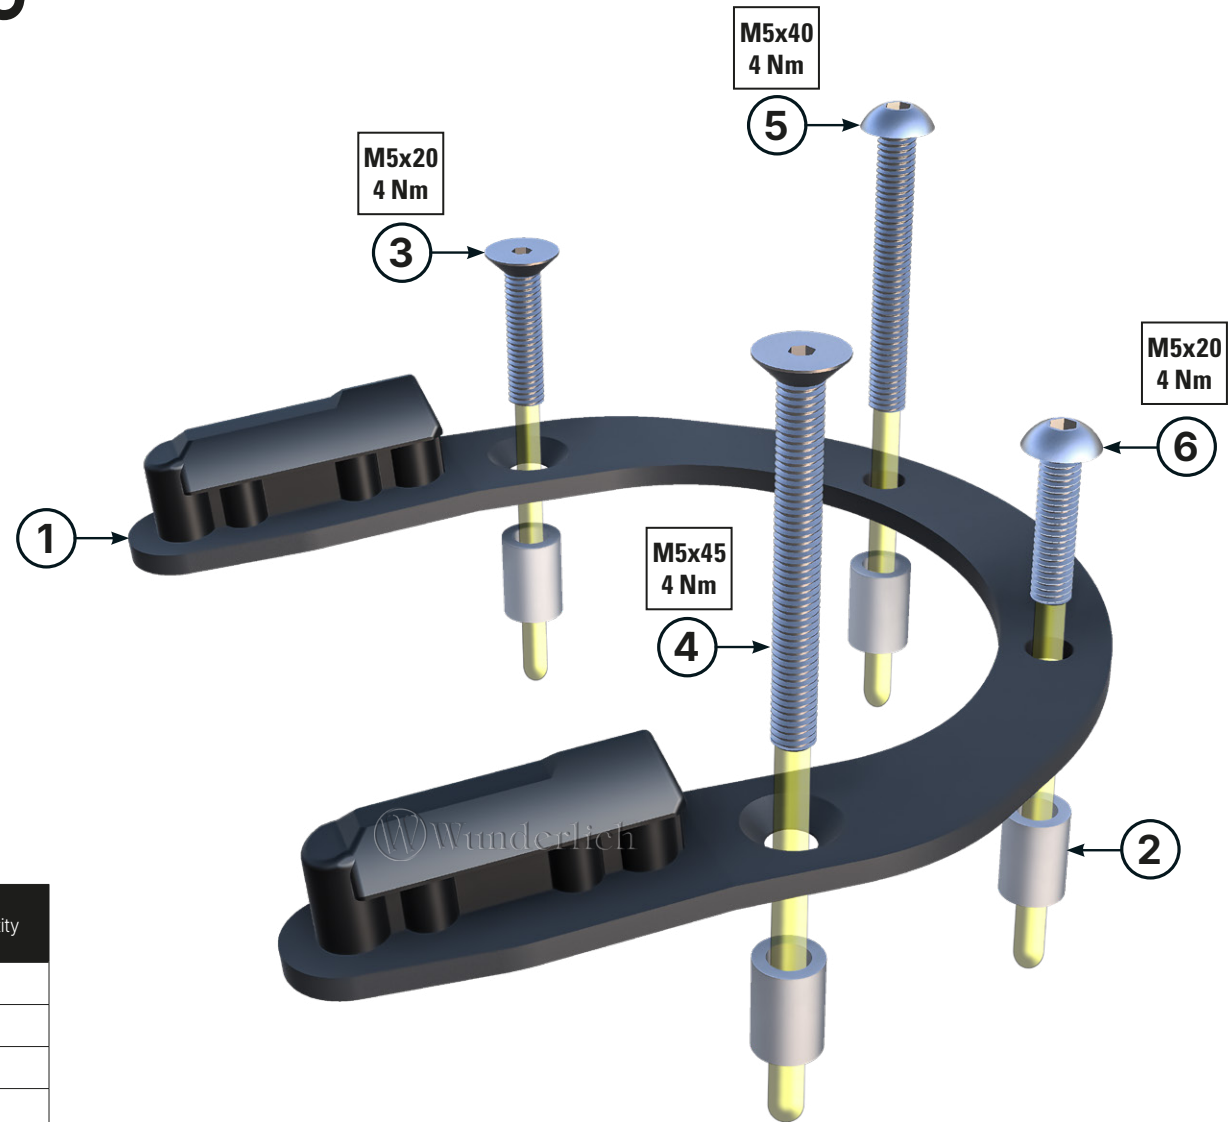

Legend

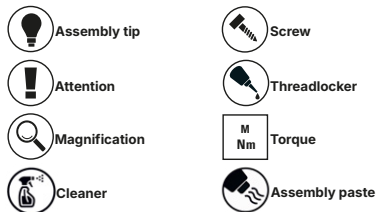

#	Component	Quantity	
The colours in the illustrations are for reference only.			
1	Bracket (cams pre-assembled)		1
2	Sleeve	7.5 mm	4
3	Countersunk screw	M5×20	1
4	Countersunk screw	M5×45	1
5	Pan-head screw	M5×40	1
6	Pan-head screw	M5×20	1

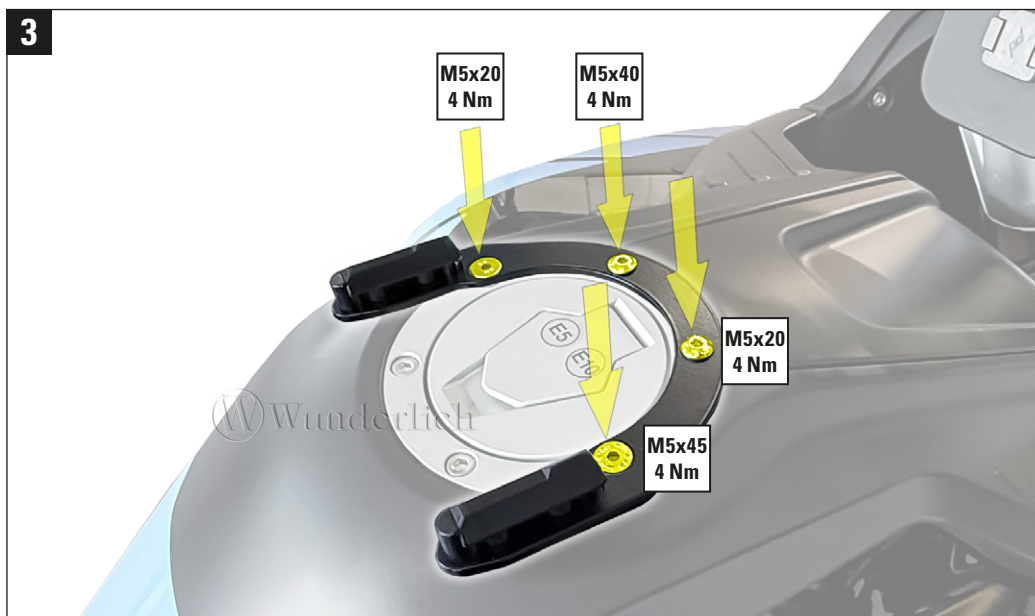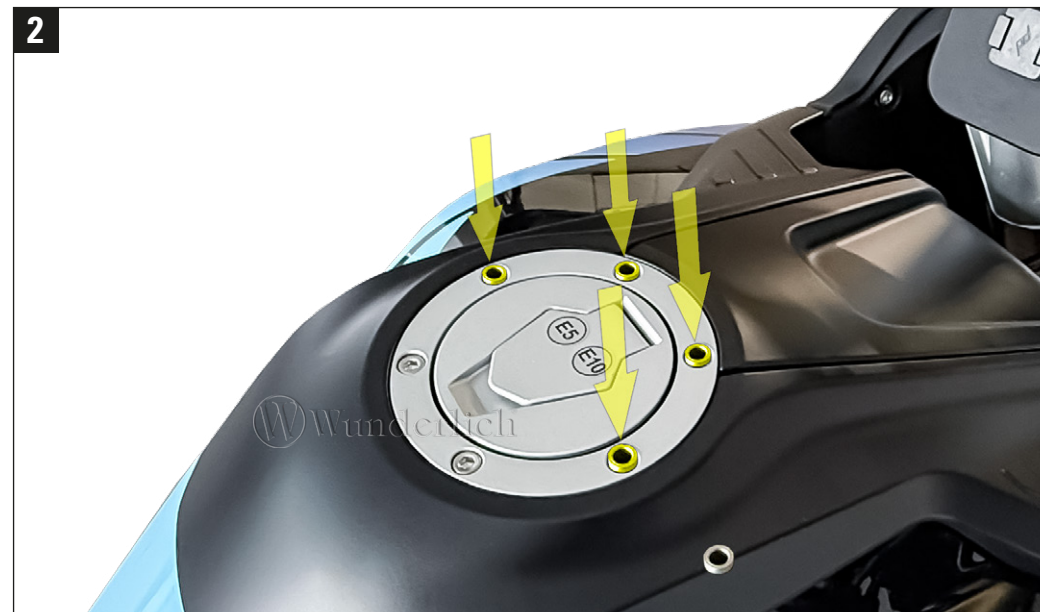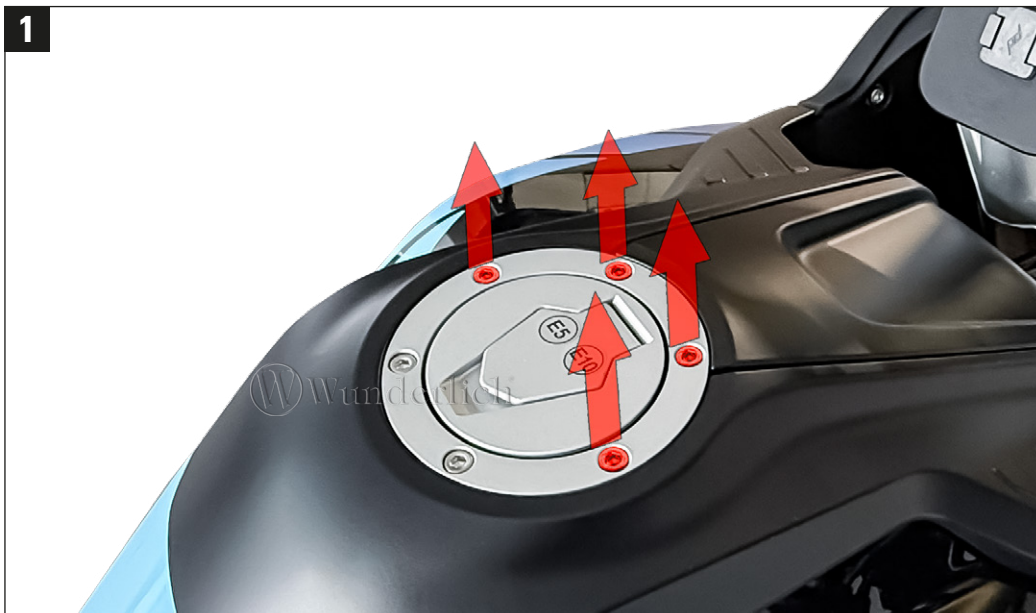

When fitting the Wunderlich tank bags, use only the brackets, tank rings and the associated locking device supplied by us. If you are not sure whether you can carry out the installation correctly, you should have it done by a specialist workshop.

First, tighten all accessible screws only finger-tight. Once everything has been fitted, tighten the screws to the specified torque. This ensures that the product is fitted without any stress.

After installation, check that all fastening elements are firmly seated; repeat this check monthly.

Each time you use it, make sure you can hear the tank bag lock engage.



The pull strap is located in the tank bag. To route or thread it through, remove the clip; it is re-threaded after the strap has been routed through.





You can choose between 3 positions. Make sure that the handlebars can move freely!